TOOLS.HELPING YOU TO TAKE CONTROL.



HOME OF QUALITY





POWER FROM STARI

LIMITLESS POSSIBILITIES!

Load grain, transport bales, remove silage, stack pallets, move tree-trunks and, and... and the best way to do all these is with a STOLL front loader and the suitable tool we provide.

Whatever the task, STOLL has the solution. Tools have to stand up to the toughest demands. That's why, at STOLL, we rely on the best material quality and German Engineering in product development. Extensive practical trials guarantee a long working life for your STOLL tools.

STOLL engineers are always developing innovations to suit the changing times, meeting your requirements and making your life easier. Because your demands are what spur us on.







TOOL HANDLING MADE EASY.



HYDRO-LOCK.

Implement locking mechanism at the touch of a button, making it even more convenient to change the implement without having to get out of the cab.



TOOL FIX.

2-way coupling for the 3rd and 4th pilot circuit. To connect the hydraulic lines even more quickly, Hydro-Fix is also available for mounting the implements.

ATTACHING THE IMPLEMENT – JUST A QUICK PIT STOP.



Drive in and hook into the front loader.



Tilt the implement – the locking mechanism automatically slots into place.



Plugging in the hydraulic connection.



3RD/4TH CONTROL CIRCUIT.

- Simple operation of hydraulic tools.
- The driver does not need an additional control device.
- Necessary for work with e.g. silage forks, bale grabs or bale stackers.



REAL³.

- A genuine 3rd control circuit to control tools independently of the front loader controls.
- ✓ The hydraulic pump in the tractor will supply the tool with oil directly.
- ▼ Tool functions can run simultaneously this makes all work faster and more effective.





DOUBLE LOCKING

- Series for FC size 5 + 6.
- Optional for FC size 4.
- For heavy work loads.

Thanks to our versatile technologies, handling your tools is child's play. Because your time is worth gold.



ALL BUCKETS IN FULL ACTION!

ROBUST U.

For universal, light to moderate use.

Order no.	Width in m	Volume heaped in m ³	Volume level heap in m³	Cutting edge Brinell 500 HB	Weight in kg	
3428170	1,15	0,47	0,41	110x16	130	
3428180	1,30	0,51	0,44	110x16	132	
3428190	1,50	0,60	0,52	150x16	161	
3428200	1,70	0,68	0,59	150x16	176	
3428210	1,90	0,76	0,66	150 x 16	211	
3428220	2,05	0,82	0,71	150x16	225	
3428230	2,20	0,89	0,77	150x16	269	
3461720	2,40	0,94	0,82	150 x 20	310	

A TOUGH PERFORMER FOR YOUR PROFILINE NEXT GENERATION: THE PERFECT BUCKET FOR EVERY DEMAND, VERSATILE IN USE AND STRONG IN CONSTRUCTION:

- High level of robustness, low wear and low weight thanks to the use of high quality steel.
- Easy work even with sticky products the conical shape, which opens up towards the cutting edge, makes this possible.
- The cutting edge can withstand the toughest stress – day after day, year after year.



Cutting edge hardness BRINELL 500



Cutting edge hardness BRINELL 500

ROBUST M.

Specifically for the loading of loose bulk materials with low weight.

Order no.	Width in m	Volume heaped in m ³	Volume level heap in m³	CUTTING EDGE Brinell 500 HB	Weight in kg	
3428330	2,05	1,45	1,13	150 x 16	320	
3429920	2,20	1,56	1,22	150 x 16	384	
3429930	2,40	1,70	1,33	200 x 20	432	
3429940	2,60	1,86	1,45	200 x 20	462	

Gripping legends and digging marvels. Our STOLL buckets get to grips with power, hand in hand with our ProfiLine Next Generation.

ROBUST S.

For working with heavy and sticky material, like wet earth or snow.



Cuttin	n edne	hardness
	DIMEL	EOO

Order no.	Width in m	Volume heaped in m ³	Volume level heap in m³	CUTTING EDGE Brinell 500 HB	Weight in kg	
3428260	1,50	0,60	0,52	150 x 16	172	
3428270	1,70	0,68	0,59	150 x 16	190	
3428280	1,90	0,74	0,64	150 x 20	242	
3428290	2,05	0,81	0,70	150 x 20	258	
3428300	2,20	0,87	0,76	150 x 20	308	
3428310	2,40	0,94	0,82	200 x 20	351	
3459310	2,60	1,01	0,88	200 x 20	376	

ROBUST T.

With tines for earth moving and digging.



Cutting edge hardness BRINELL 500

Order no.	Width in m	Volume heaped in m ³	Volume level heap in m³	CUTTING EDGE Brinell 500 HB	Weight in kg	Tines
3436990	1,50	0,60	0,52	150 x 16	177	5
3437000	1,70	0,68	0,59	150 x 16	196	6
3437010	1,90	0,74	0,64	150 x 20	249	6
3437020	2,05	0,81	0,70	150 x 20	266	7
3437030	2,20	0,87	0,76	150 x 20	316	7
3437040	2,40	0,94	0,82	200 x 20	359	8
3459300	2,60	1,01	0,88	200 x 20	385	8

Multifunctional compact marvels packing all sorts of power. **Our ProfiLine Next Generation** tools ar every farmer's best partner. Grab one yourself!

GRAB IT!

WHETHER IN ANIMAL HUSBANDRY OR BIOGAS PLANTS – SILAGE IS EVERYWHERE.

- ✓ For all silage-related processes there is a suitable ProfiLine Next Generation tool from STOLL.
- Effective and comfortable each tool can be easily and precisely controlled.
- Our tip: the large grapple buckets have a huge volume. In biogas plants you can easily keep up with wheel loaders.







MULIT-PURPOSE BUCKET HD.

Order no.	Width in m	Volume in m³	Opening width in mm	Weight in kg			
3668340	2,05	0,85	1.320	443			
3668350	2,20	0,92	1.320	472			
3668360	2,50	1,00	1.320	512			
Side plate (detail	s per set)						
3659430							
Lateral teeth (details per set)							
3659420							
3rd control circ	uit required						

BUCKET WITH GRAPPLE.

The universal implement for silage handling: thanks to the closed bottom, also wet and/or loose material can be handled.

Order no.	Width in m	Volume in m³	Opening width in mm	Weight in kg		
3547610	1,50	0,59	1.290	292		
3547620	1,70	0,67	1.290	314		
3547630	2,05	0,82	1.290	373		
3547650	2,20	0,88	1.290	423		
Side panel optio	nal (details per un	it)				
3548350						
3rd control circu	uit required					

FORK WITH GRAPPLE.


Perfect to transport silage or manure.

Order no.	Width in m	Volume heaped in m³	Tines bottom	Opening width in mm	Weight in kg	
3429090	1,30	0,54	7	1.300	226	
3429100	1,50	0,63	8	1.300	249	
3429110	1,70	0,71	9	1.300	268	
3429120	2,05	0,87	11	1.300	304	
3430650	2,40	1,02	13	1.300	355	
3rd control circ	uit required					




SILAGE CUTTERS PROFI-CUT.For taking portions of silage; the serrated edge ensures a straight cut.

Order no.	Width in m	Volume heaped in m ³	Depth in mm	Opening width in mm	Number of tines	Weight in kg			
3334760	1,28	0,87	790	856	10	500			
2449320	1,52	1,05	790	856	13	530			
3306680	1,88	1,28	790	856	16	730			
Shove off device	;								
3521560									
3rd control circu	3rd control circuit required With width 1,88 two shove off devices required.								



MANURE FORK.
For handling manure. The arrangement of the tines prevents load loss.

Order no.	Width in m	Tine length in mm	Number of tines	Weight in kg					
3364760	1,25	810	7	125					
3364690	1,50	810	8	145					
3364520	1,75	810	10	165					
Lateral tine (deta	Lateral tine (details per set)								
3534780									
3611820	2,00	810	11	243					
3611830	2,00	1.100	11	264					
3611930	2,25	1.100	12	288					
3660460	2,50	1.100	14	318					
Lateral tine (deta	Lateral tine (details per set)								
3534780									
Loading grill (fo	or forks from 2.00 n	n working width)							
3599680	2,00			40					



Even wheel loaders are quaking in their boots. Pros for the ProfiLine Next Generation.



Suitable for all kinds of silage: ideal for direct loading and transportation.

Order no.	Width in m	Opening width in mm	Volume in m³	Weight in kg			
3687650	1,60	1.480	0,88	512			
3687660	1,80	1.480	1,00	549			
3687670	2,00	1.480	1,10	601			
3687680	2,20	1.480	1,21	641			
3687690	2,50	1.480	1,38	753			
Corn tine optional (details per set)							
3635370							



DISPOSER BUCKET.

3rd control circuit required

3rd control circuit required

Multi-functional implement, especially for bulky goods.

		·							
Order no.	Width in m	Opening width in mm	Volume in m³	Weight in kg					
3591550	1,80	1.480	1,00	557					
3632970	2,00	1.480	1,10	605					
3591560	2,20	1.480	1,21	636					
3602920	2,50	1.480	1,38	762					
Side plate optio	Side plate optional (details per set)								





TO THE BALES, GET SET, GO!

EVERY SUMMER IS HIGH SEASON FOR BALES – PREPARE YOURSELVES IN GOOD TIME: WITH STOLL BALE TOOLS.

Whether round or square bales, with foil or without: At STOLL you can always find the right tools.







WRAPPED BALE HANDLER H.

Perfectly suitable for foil wrapped round bales: there are no sharp edges that can damage the foil.

Order no.	Weight in kg								
2364610	225								
For round bales @	For round bales Ø from 1,00 m to 1,80 m / for square bales Ø 1,60 m 3rd control circuit required								

WRAPPED BALE HANDLER-PRO H.

For the safe handling of round and square wrapped bales.

Order no.	Weight in kg							
3395020	305							
Largest / smallest opening: 2,05 m / 0,65 m Effective depth: 1,20 m Transport width: 1,35 m for square and round wrapped bales								

Largest / smallest opening: 2,05 m / 0,65 m | Effective depth: 1,20 m | Transport width: 1,35 m | for square and round wrapped bales


3rd control circuit required

BALE CARRIER REAR.

For the transport of round and wrapped bales in the rear.

Order no.	Weight in kg							
3336750	115							
Tractor rear three-point linkage or device triangle I Gripping area from 0,94 m to 1,34 m in 5 cm intervals / Lift arm boom length 1,28 m								





BALE CARRIER REAR H.Ideal for transporting round bales.

Order no.	Weight in kg							
3380410	105							
For round bales Gripping area from 0,82 m to 1,22 m / Beam length 1,28 m / Pipe diameter 0,16 m								



MAXI BALE CLAW H.
Simultaneously grab, lift and load up to two bales.

Order no.	Weight in kg							
2449950	150							
For round and square bales I 3rd control circuit required								



Fits all bale types.

Order no.	Weight in kg								
3573240	245								
For round and square wrapped bales / Gripping range from 0,60 m to 1,85 m 3rd control circuit required									



BALE FORK LIFT H.

The built-in lifting device brings a height gain of up to 1,40 m.

Order no.	Weight in kg								
1339660	260								
For round and squ	For round and square bales / lifting height gain of 1,40 m to the normal height I 3rd control circuit required								

Anyone can pile it on thick, but only a few are true to their word. Our pallet and bale forks are real experts in their field.









BALE SPIKE H.

Variable tine placing – so the spike suits all bales.

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg						
3378240		1x800/1x1.200	92						
3484720		2 x 800	89						
3411860		2 x 1.200	95						
Frame									
3385190	1.000		76						
Heavy duty tine	s (per unit)								
1330130		1.200	9						
Heavy duty tines (per unit)									
0476240		800	5						
For round and squ	uare bales Additio	nal tines can be reti	rofitted						

BIG BALE FORK HS.

The distance between the tines can be easily changed. Pallet fork tines can also be mounted onto these frames.

Order no.	Tine in mm	Weight in kg
3684190	1.200	137
3684200	1.200 foldable	143
Frame HS		
3654340	-	110
Frame HS (detail	s per unit)	
2400050	1.200	20
3331520	1.200 foldable	23
For round and squ	uare bales	

BIG BALE FORK.

For safe transport of multiple stacked bales.

Order no.	Tine in mm	Weight in kg	Payload in kg							
3611920	1.200 foldable	147	1.000							
For round and squ	For round and square bales. For safe empty driving on public roads, the bale tines can be folded upwards.									

EVERY-THING ALRIGHT.

LIFTING, LOADING, STACKING – WITH STOLL PALLET FORKS FOR YOUR PROFILINE NEXT GENERATION YOU WILL ALWAYS WORK PRECISELY:

- These pallet forks are particularly sturdy because STOLL places a high value on robust construction and top-quality materials.
- You can position the tines exactly how you need them for your work. The tines can be moved by hand.
- The largest pallet fork lifts up to 3.5 t and belongs in the top class of front loader tools







PALLET FORK HD.

The forks can be moved freely — the driver can also mount bale tines to the frame.

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg	Width in mm	Connection						
3646850	2.500	1.200	196	1.250	ISO 2328						
3654360	1.600	1.200	166	1.250	ISO 2328						
3654370	1.600	1.000	158	1.250	ISO 2328						
Frame HD	Frame HD										
3654340	2.500		94	1.250	ISO 2328						
Pallet tine HD (p	er unit)										
3570730	1.250	1.200	51		ISO 2A						
3570720	800	1.200	36		ISO 2A						
3570710	800	1.000	32		ISO 2A						
Frame includes 3	bushes for bale tin	es									

PALLET FORK HD WITH SIDE SHIFT

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg	Width in mm	Connection										
3614380	2000	1.200	257	1.250	ISO 2328										
Frame HD															
3666450	2.000		155	1.250	ISO 2328										
Pallet tine HD (p	Pallet tine HD (per unit)														
3570730	1.250	1.200	51		ISO 2A										
Side shift +/- 145	mm 3rd contro	l circuit required				Side shift +/- 145 mm 3rd control circuit required									

PALLET FORK HS 1500

In addition to the pallet fork tines, as many as four bale tines can be mounted on the frame.

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg	Width in mm	Connection					
3430830	1.600	1.000	185	1.500	ISO 2328					
3434900	1.600	1.200	200	1.500	ISO 2328					
Frame HS 1500	Frame HS 1500									
3434840	1.600		115	1.500	ISO 2328					
Pallet tine HD (p	Pallet tine HD (per unit)									
3570710	800	1.000	43		ISO 2A					
3570720	800	1.200	66		ISO 2A					

LIFTING-AIDS.

HEAVY LIFTING – LIGHT WORK.

The declared goal of our STOLL engineers is developing tools to make farming more efficient. With reduced manpower and robust technology you can manage your daily tasks much more easily. Your ProfiLine Next Generation will also feel the benefit.

Woodlands also need STOLL. We give you the best support in forestry operations. Because our your woodlands are worth it.



BIGBAG-LIFT.

Especially developed for bulk bags with one or two loops.

The implement raises the load above the implement rotation point — so the view is guaranteed to be free.

Order no.	Payload in kg	Weight in kg	Lifting height above implement pivot point in mm					
3602900	1.000	115	1.500					
For bulk bags up to 1,000 kg								



BAG-LIFT H.

Perfect for bulk bags with four loops.

Order no.	Payload in kg	Weight in kg	Lifting height above implement pivot point in mm					
2357100	1.000	180	500					
For bulk bags up to 1,000 kg								



LOADING HOOK.

For good balance during transport: the load is centered near the front axle.

Order no.	Lifting capacity in kg	Weight in kg			
2309670	2.000	16			
The hook is swive	el mounted				

IDEAL FOR TIMBER AND FORESTRY.

WOOD MAKING – STOLL FORESTRY IMPLEMENTS ENSURE EFFECTIVE WORK.

The log fork H and the log fork are specialists in forestry.



LOG FORK H WITH HYDRAULIC TOP-LOADING GRIP.

Gripping of logs with the top loading grip – so nothing is lost.

Order no.	Grip opening in m (clear width)	Weight in kg						
3390260	1,04	235						
3rd control circuit required								



LOG FORK H.

For the transport and bunching of logs.

Order no.	Weight in kg			
1317750	150			



TOP LOADING GRIP.

The ideal complement to the pallet fork, to retrieve or load logs.

Order no.	Opening width in mm	Weight in kg						
3548990	1.385	79						
For pallet fork HD and HS 1500 (must be ordered separately) – 3rd control circuit required								

THE SMART EXTRA.



SAFETY GRILL.

So nothing slips: secures the load to the rear.

Order no.	Weight in kg							
3570550	23							
For big bale fork HS and pallet fork HD – Does not fit for 1.500 mm frames								



14 DEG ADAPTER.

Thanks to the improved tilt angle everything stays inside the bucket.

Order no.	Weight in kg							
3522000	12							
To improve the tipping angle (crowd) (set: 2 brackets incl. screws) – fits only for buckets and manure forks								



THREE-POINT-LINKAGE-ADAPTER.

For the rear-mounted hook implements.

Order no.	Weight in kg								
3386990	60								
For hook implements in 3 point rear mounting, lifting capacity 1,5 t at the coupling point of the lower linkage									







CONVERSION KIT TO HOOK IMPLEMENTS.

For the conversion of hook implements to Euro standard.

eight n kg	Order no.
19	1334090
ten (li. + re.)	z kpl. Anschl

HOOKS AND EYES.

The individual set for conversion to hook implements.

Order no.	Weight in kg		
3320080			
Loose set: 2 hook	s, 2 eyes		

IMPLEMENT STAND.

Everything tidy: the ideal storage space for up to four implements.

Order no.	Width in m	Height in m	Weight in kg				
3523120	1,22	2,40	150				
Delivery without implements.							

ADAPTER / QUICK-CHANGE FRAME.

Order no.	Weight in kg			
3664360	70			
Adapter Euro to Te	enias			
3551060	44			
Adapter Euro to Fa	aucheux			
3733790	78			
MX tool adapter for	or Euro quick-chan	ge frame mechanic	al locking device	
Option:				
Skid Steer quick-o	change frame			
Euro quick-chang	e frame			
Euro + Alö quick-	change frame			
Euro +SMS quick	-change frame			

STOLL thinks globally and liberally. That's why, in our range, you will also find smart special solutions for ProfiLine Next Generation, if that's what your life requires. STOLL supports you all the time.


EVERY TOOL FITS -EVEN THOSE BY OTHER MANUFACTURERS.

- Our customers can attach all tools with a Euro attachment to STOLL front loaders in the ProfiLine Next Generation series and the Solid.
- Even coupling systems from other manufacturers fit with these front loaders - with our combi-change frame.









MX tool adapter for Euro quick-change frame

Skid Steer





Euro + SMS

CLASSIC ALL-ROUNDER.

THE SOLID STANDS OUT FOR ITS FLEXIBLE USAGE POSSI-BILITIES: EVERYTHING IN THE USUAL TOP STOLL QUALITY WITH AN EXCEPTIONAL PRICE/PERFORMANCE RATIO. HERE YOU WILL FIND THE EXTENSIVE TOOL RANGE THAT FITS THE SOLID.

- Easy to handle
- Flexible implementation
- Long working life

PALLET FORK.

Pallet loading made easy. Thanks to its sturdy construction, you can pick up to 1.000 kg at a time with the pallet fork. Adjust the spacing of the pallet tines to suit your needs.

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg	Width in mm	Connection	
Pallet fork						
3567980	1.000	1.000	113	1.200	ISO 2328	
Frame						
3567990	1.000	-	59	1.200	ISO 2328	
Pallet tine (per u	nit)					
3570700	500	1.000	27		ISO 1A	







So your wrapped bales remain undamaged. The wrapped bale tongs have no sharp edges and have been developed specifically for the transportation and loading of wrapped bales.

Order no.	Opening width in mm (largest/smallest)	Weight in kg						
3714810	1.400/800	114						
For round bales ø	For round bales ø from 0,80 m to 1,40 m, 3rd control circuit required							

BALE SPIKE

A spike for all bales. Transport round and square bales easily and safely with the bale spike. The tines can be placed in four positions in the frame, depending on the application.

Order no.	Lifting capacity in kg	Tine in mm	Weight in kg			
3611810	700	2x800	68			
3608420	700	2x1.200	76			
Frame						
3608430			58			
Tine						
0476240		800	5			
Tine						
1330130		1.200	9			
The bale spike ha	s been developed f	or the handling of r	ound and square b	ales.		



UNIVERSAL BUCKET.

Ideal for light to moderate use.

Your loose bulk material can also be easily loaded.



Order no.	Width in m	Volume heaped in m ³	Volume level heap in m³	Weight in kg		
3550490	1,40	0,45	0,36	99		
3550500	1,60	0,52	0,41	109		
3550510	1,85	0,61	0,48	131		
3550520	2,10	0,70	0,55	171		

The superheroes of tools.

Steeled for every challenge, these tools stand their ground. Reliable and powerful.



COMPACT LOADERS.


IDEAL FOR ALL TASKS – THE EXTENSIVE COMPACTLINE TOOL RANGE REMAIN IMPRESSIVE IN TIGHT SITUATIONS.

- Shovelling, grabbing or loading STOLL tools offer the right solution for all tasks. Round about the house and farmyard, forest, garden and landscaping!
- ✓ For the driver to have unobstructed sight of the working zone, all tools have a Skid Steer attachment.
- ✓ Even the small ones have great power: the light and compact construction of these tools fits perfectly with the CompactLine.

The sandpit's over. Our CompactLine buckets load, shovel and grab like the big boys.



For all loading work.



Order no.	Width in m	Height in m	Depth in m	Volume level heap in m³	Volume heaped in m³	Weight in kg	
3634460	1,22*	0,45	0,46	0,15	0,17	70	
3533440	1,22	0,57	0,60	0,18	0,21	100	
3495570	1,40	0,57	0,60	0,21	0,24	108	
3478580	1,57	0,57	0,60	0,27	0,31	118	
3478590	1,74	0,57	0,60	0,30	0,35	130	
* for CompactLine	FC 150 P						

BUCKET WITH GRAPPLE.The universal gripper, because thanks to the closed bottom, wet and/or loose material can also be transported.



Order no.	Width in m	Height in m	Depth in m	Opening in mm	Weight in kg			
3535300	1,20	0,67	0,60	950	115			
3535310	1,45	0,67	0,60	950	130			
3rd control circuit required								

Whether it's bale-handling, pallet loading, log moving or other tasks, compact STOLL tools are all-rounders. They work daily to stand up to tricky, highly diverse tasks.



FORK WITH GRAPPLE.

Ideal to retrieve and load manure, compost, shrubs and silage.


Order no.	Width in m	Height in m	Dept in m	Opening width in mm	Weight in kg				
3535320	1,20	0,69	0,61	950	120				
3535330	1,45	0,69	0,61	950	135				
3rd control circ	3rd control circuit required								



GRIP FORK

A must in forestry and landscape maintenance: With the strong tines it grabs bulky tree trunks and branches.

Order no.	Width in m	Opening width in mm	Weight in kg		
3508220	1,15	870	130		
3rd control circ	uit required				



MANURE FORK.

For loading of farmyard manure and compost.

Order no.	Width in m	Height in m	Depth in m	Weight in kg		
3509620	1,21	0,56	0,67	68		
3535290	1,45	0,56	0,67	79		


BALE TINE.

Compact bale handling in narrow courtyards or stables.

Order no.	Tine in mm	Weight in kg	Lifting capacity in kg		
3486330	800	60	1000		
Frame					
3486100	-	36	_		
Bale tine (per un	it)				
3486320	800	12	500		
Optional pallet t	tine (per unit)				
3486290	800	12	500		

PALLET FORK.

The classic to load pallets.

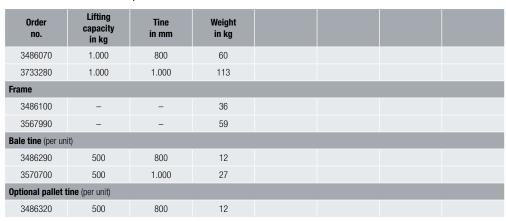

TOP LOADING GRIP.

The ideal complement to the pallet fork, to retrieve or load logs.

Order no.	Opening width in mm	Weight in kg					
3520780	870	40					
For CompactLine pallet fork (has to be ordered separately) 3rd control circuit required							








LOG GRAPPLE.

Grab and load logs individually.

Order no.	Width in m	Opening width in mm (max.)	Weight in kg					
3556810	0,29	750	115					
Log grapple wit	Log grapple without boom (can be combined with boom of shovel)							
3611140								
Rotator optional								
3601520								
3rd control circ	3rd control circuit required							

SHOVEL.

Dig narrow, deep trenches – up to 1,16 m below ground level.

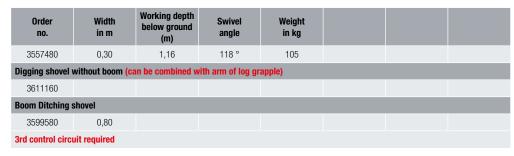




THREE-POINT-ADAPTER.

For the rear mounting of implements for CompactLine onto tractors.

Order no.	Payload in kg	Weight in kg			
3601100	500	38			



Looking for an implement to compliment your other brand of loader? We are here to help. That's exactly why we have constructed adapter frames for the CompactLine that allow you to complete your tractor and a previously owned loader from a different brand with our tools.



ATTACHMENT FRAME EURO-SKID

Mount implements with Euro-connection onto a Skid Steer attachment frame.

Order no.	Weight in kg		
3547310	23,5		



IMPLEMENT ADAPTER FOR JOHN DEER! COMPACT FRONT LOADER.

Real STOLL quality on John Deere compact loaders.

Order no.	Weight in kg		
3571680	30		



Wilhelm STOLL Maschinenfabrik GmbH Bahnhofstr. 21 | 38268 Lengede Telephone: +49 (0) 53 44 / 20-222 Fax: +49 (0) 53 44 / 20-182